

# LOCTITE® SI 5240™

Known as LOCTITE® 5240™  
September 2020

## PRODUCT DESCRIPTION

LOCTITE® SI 5240™ provides the following product characteristics:

|                                    |                                                                                                                      |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>Technology</b>                  | Silicone                                                                                                             |
| <b>Chemical Type</b>               | Alkoxy silicone                                                                                                      |
| <b>Appearance (uncured)</b>        | Clear liquid with yellow to green tint slight haze permissible <sup>LMS</sup>                                        |
| <b>Components</b>                  | One component - requires no mixing                                                                                   |
| <b>Cure</b>                        | Ultraviolet (UV) / Visible light                                                                                     |
| <b>Secondary Cure</b>              | Moisture for shadowed areas                                                                                          |
| <b>Application</b>                 | <ul style="list-style-type: none"> <li>• Bonding</li> <li>• Potting</li> <li>• Coating</li> <li>• Sealing</li> </ul> |
| <b>Unique Flow Characteristics</b> | Thixotropic product that will thin with shear yet provides uniform cavity fill                                       |

LOCTITE® SI 5240™ is a flowable sealant with the benefit of deep light cure capability, ultraviolet and visible, combined with a secondary neutral moisture cure mechanism for shadow curing. Upon exposure to sufficient UV light, visible light or atmospheric moisture, this product forms a medium strength, flexible rubber sealant.

## ISO-10993

LOCTITE® SI 5240™ has been tested to Henkel's test protocols based on ISO 10993 biocompatibility standards, as a means to assist in the selection of products for use in the medical device industry.

## TYPICAL PROPERTIES OF UNCURED MATERIAL

Specific Gravity @ °C 1.06

Viscosity, Brookfield - RVT, 25°C, mPa·s (cP):  
Spindle 5, speed 10 rpm 15,000 to 35,000<sup>LMS</sup>

Flash Point - See SDS

## TYPICAL CURING PERFORMANCE

Normal processing conditions will include exposure to sufficient UV light irradiance to effectively cure the material. Surface and/or atmospheric moisture will promote the cure of material in shadowed regions. Although functional strength is developed almost instantly due to the UV curing nature of LOCTITE® SI 5240™, increased cure properties are developed during 72 hours at ambient conditions.

### Tack Free Time

Tack Free Time is the time required to achieve a tack free surface

Tack Free Time, seconds:

Zeta® 7760:  
225 mW/cm², measured @ 320 to 400 nm 50 to 55

Zeta® 7411-S:  
50 mW/cm², measured @ 320 to 400 nm 90 to 105

Tack Free Time, seconds:

Zeta® 7215:  
90 mW/cm², measured @ 320 to 400 nm 90 to 105


Electrodeless, H bulb:  
500 mW/cm², measured @ 320 to 400 nm 5 to 10

### Depth of Cure

Depth of cure (cure time 60seconds), mm:  
70 mW/cm², measured @ 365 nm, <sup>≥10<sup>LMS</sup></sup>  
using a Zeta® 7200 light source


### Depth of Cure (light)

Rapid depth of cure can be attained with focused UV and/or visible light. The following graph shows the cure response of some typical light sources as a function of time.

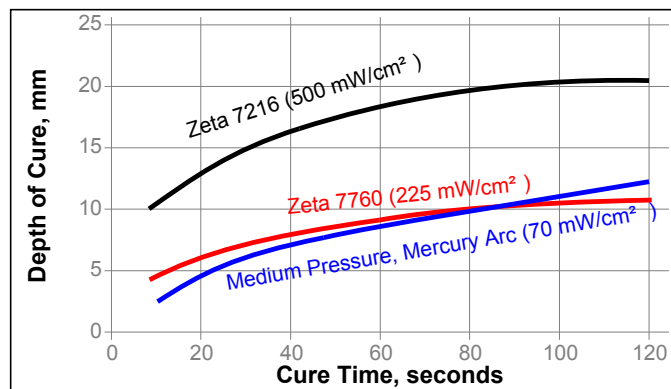

**Depth of Cure (moisture only)**

Moisture cure of shadowed areas rely on atmospheric moisture. The depth of cure from moisture versus time at 25 °C and 50% relative humidity is shown in the graph below.

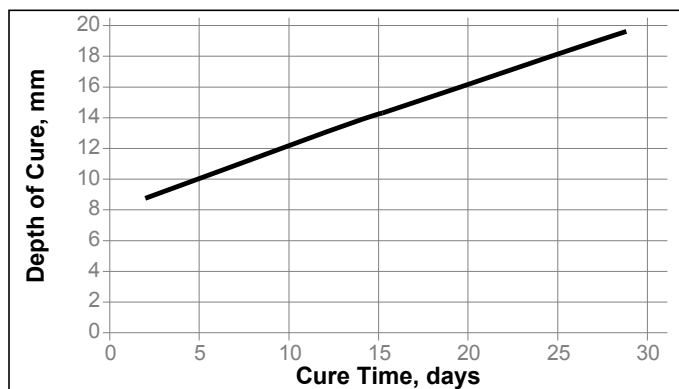**Electrical Properties:**

|                                                         |                       |
|---------------------------------------------------------|-----------------------|
| Dielectric Breakdown Strength, IEC 60243-1, kV/mm       | 21                    |
| Dielectric Constant / Dissipation Factor, IEC 60250:    |                       |
| 1 kHz                                                   | 2.8 / 0.05            |
| 1 MHz                                                   | 2.8 / 0.004           |
| Volume Resistivity, IEC 60093, $\Omega \cdot \text{cm}$ | $1.2 \times 10^{15}$  |
| Surface Resistivity, IEC 60093, $\Omega$                | $5.15 \times 10^{15}$ |

After 7 days @ 22°C / 50% RH, Moisture cure only

**Physical Properties:**

|                                                |                                     |
|------------------------------------------------|-------------------------------------|
| Elongation, at break, ISO 527-3, %             | 730                                 |
| Tensile Strength, at break, ISO 527-3          | N/mm <sup>2</sup> 0.5<br>(psi) (80) |
| Tensile Modulus, at 100% elongation, ISO 527-3 | N/mm <sup>2</sup> 0.1<br>(psi) (20) |
| Tear Strength, ISO 34-1, Die C                 | N/mm 2<br>(lb./in.) (11)            |

**Fixture Time vs. UV Intensity**

Fixture time is defined as the time to develop a shear strength of 0.1 N/mm<sup>2</sup>.

UV Fixture Time, Glass microscope slides, seconds:

Medium Pressure Hg Arc source, Zeta® 7215:  
70 mW/cm<sup>2</sup>, measured @ 320-400 nm 5 to 10

Electrodeless system, H bulb:  
500 mW/cm<sup>2</sup>, measured @ 320-400 nm 5 to 10

Zeta® 7760 UV wand system:  
225 mW/cm<sup>2</sup>, measured @ 320-400 nm 5 to 10

Zeta® 7411-S flood system:  
50 mW/cm<sup>2</sup>, measured @ 320-400 nm 5 to 10

After 14 days @ 22 °C / 50% RH, Moisture cure only

**Physical Properties:**

|                                                |                                      |
|------------------------------------------------|--------------------------------------|
| Elongation, at break, ISO 527-3, %             | 530                                  |
| Tensile Strength, at break, ISO 527-3          | N/mm <sup>2</sup> 0.7<br>(psi) (110) |
| Tensile Modulus, at 100% elongation, ISO 527-3 | N/mm <sup>2</sup> 0.2<br>(psi) (30)  |
| Tear Strength, ISO 34-1, Die C                 | N/mm 3.7<br>(lb./in.) (21)           |

**TYPICAL PROPERTIES OF CURED MATERIAL**

Cured @ 70 mW/cm<sup>2</sup>, measured @ 365 nm for 60 seconds per side, using a medium pressure mercury arc light source, followed by 7 days @ 22 °C.

**Physical Properties:**

|                                                                  |                                                     |
|------------------------------------------------------------------|-----------------------------------------------------|
| Shore Hardness, ISO 868, Durometer A                             | ≥40 <sup>LMS</sup>                                  |
| Elongation, at break, ISO 527-3, %                               | 250 to 450 <sup>LMS</sup>                           |
| Tensile Strength, ISO 527-3                                      | N/mm <sup>2</sup> ≥3 <sup>LMS</sup><br>(psi) (≥435) |
| Tensile Modulus, at 100% elongation, ISO 527-2                   | N/mm <sup>2</sup> 1<br>(psi) (145)                  |
| Tear Strength, ISO 34-1, Die C                                   | N/mm 12.6<br>(lb./in.) (72)                         |
| Volume Shrinkage, ISO 1675 %                                     | 0.8                                                 |
| Linear Shrinkage, in/in ISO 1675                                 | 0.3                                                 |
| Coefficient of Thermal Expansion, ISO 11359-2, K <sup>-1</sup> : |                                                     |
| Pre Tg                                                           | 285×10 <sup>-6</sup>                                |
| Post Tg                                                          | 390×10 <sup>-6</sup>                                |

**TYPICAL PERFORMANCE OF CURED MATERIAL****Adhesive Properties**

Cured @ 70 mW/cm<sup>2</sup>, measured @ 365 nm for 60 seconds per side, using a medium pressure mercury arc light source, followed by 7 days @ 22 °C

Lap Shear Strength, :

|                   |                                      |
|-------------------|--------------------------------------|
| Aluminum to Glass | N/mm <sup>2</sup> 1<br>(psi) (145)   |
| Steel to Glass    | N/mm <sup>2</sup> 1.1<br>(psi) (155) |
| Glass to Glass    | N/mm <sup>2</sup> 0.6<br>(psi) (85)  |
| PVC to Glass      | N/mm <sup>2</sup> 0.9<br>(psi) (140) |
| ABS to Glass      | N/mm <sup>2</sup> 0.7<br>(psi) (100) |

**TYPICAL ENVIRONMENTAL RESISTANCE**

Cured @ 70 mW/cm<sup>2</sup>, measured @ 365 nm, for 60 seconds per side, using a medium pressure mercury arc light source, followed by 7 days @ 22 °C

**Heat Aging**

Aged at temperature indicated and tested @ 22 °C

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 85 °C, 85 %RH for 168 hours :       |     |
| Change in Durometer, Points (Initial = 38) | -11 |
| Change in Tensile Strength, %              | -84 |
| Change in Elongation, %                    | -64 |

|                                            |    |
|--------------------------------------------|----|
| Aged @ 60 °C for 168 hours:                |    |
| Change in Durometer, Points (Initial = 38) | 4  |
| Change in Tensile Strength, %              | 7  |
| Change in Elongation, %                    | -9 |

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 100 °C for 168 hours:               |     |
| Change in Durometer, Points (Initial = 38) | 10  |
| Change in Tensile Strength, %              | 26  |
| Change in Elongation, %                    | -26 |

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 150 °C for 168 hours:               |     |
| Change in Durometer, Points (Initial = 38) | -4  |
| Change in Tensile Strength, %              | -47 |
| Change in Elongation, %                    | -27 |

**Heat Aging**

Aged at temperatures indicated and tested @ 22 °C

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 85 °C, 85 %RH for 336 hours :       |     |
| Change in Durometer, Points (Initial = 38) | -17 |
| Change in Tensile Strength, %              | -87 |
| Change in Elongation, %                    | -72 |

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 60 °C for 336 hours:                |     |
| Change in Durometer, Points (Initial = 38) | 5   |
| Change in Tensile Strength, %              | 5   |
| Change in Elongation, %                    | -13 |

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 100 °C for 336 hours:               |     |
| Change in Durometer, Points (Initial = 38) | 10  |
| Change in Tensile Strength, %              | 28  |
| Change in Elongation, %                    | -22 |

|                                            |     |
|--------------------------------------------|-----|
| Aged @ 100 °C for 336 hours:               |     |
| Change in Durometer, Points (Initial = 38) | -3  |
| Change in Tensile Strength, %              | -34 |
| Change in Elongation, %                    | -7  |

**GENERAL INFORMATION**

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Safety Data Sheet (SDS).**

**Directions For Use:**

1. For best performance bond surfaces should be clean and free from grease.
2. The product is designed to be initially cured by UV/visible light at a minimum irradiance of 70 mW/cm<sup>2</sup> for approximately 60 seconds, increased exposure may be required for curing deeper sections.
3. Functional strength is achieved almost instantly.
4. Full performance properties will develop over 72 hours.
5. Moisture curing begins immediately after the product is exposed to the atmosphere, therefore parts to be assembled should be mated within a few minutes after the product is dispensed.
6. Excess material can be easily wiped away with non-polar solvents.

**Loctite Material Specification<sup>LMS</sup>**

LMS dated January 28, 2010. Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Quality.

**Storage**

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

**Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.**

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

**Conversions**

(°C x 1.8) + 32 = °F  
 kV/mm x 25.4 = V/mil  
 mm / 25.4 = inches  
 µm / 25.4 = mil  
 N x 0.225 = lb  
 N/mm x 5.71 = lb/in  
 N/mm<sup>2</sup> x 145 = psi  
 MPa x 145 = psi  
 N·m x 8.851 = lb·in  
 N·m x 0.738 = lb·ft  
 N·mm x 0.142 = oz·in  
 mPa·s = cP

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:**

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

**In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

**Trademark usage**

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference **N/A**